

## DATASHEET

# NE075DC05A 48 V<sub>DC</sub> to 5 V<sub>DC</sub> Converter

Ordering Code: 150041591



## Solar Applications

The NE075DC05 48 to 5V converter compliments our ECO Priority rectifiers for use in off grid solar applications where the served equipment may be a collection of equipment, some of which requires 48 Volts DC and some of which requires 5 Volts DC.

## Features and Advantages

- Compact - 1RU form factor provides high power density.
- Efficient - Peak efficiency of 94 % occurs at less than 50% load matching sweet spots with customer use patterns.
- Flexibly provides 75 Amps of 5 Volt power from any 48 Volt DC source.
- Starts and runs at any DC voltage from 40 to 60 V<sub>DC</sub>.
- Operates over a broad temperature range (-40°C through +75°C).
- Fail safe performance – hot insertion capabilities allow for converter replacement without system shutdown; inrush current protection prevents nuisance tripping of upstream breakers; coordinated start up assures that even large loads start.
- Extended service life – parallel operation with automatic load sharing ensures that units are not unduly stressed.

## A True System Solution

NE075DC05 converters and ECO Priority Rectifiers are part of the proven Infinity Power System specifically designed for wireless sites.

- Monitoring / control – the built in microprocessor controls and monitors all critical converter functions and communicates with the system controller using the built in Galaxy Protocol serial interface.
- Dual Voltage Compatible - unique connector pin designation allows the 48 to 5 Volt converter to be used in a “Universal” power shelf, alongside ECO Rectifiers supporting loads and batteries at 48 Volts DC.
- Plug and Play – installation of the converter in a shelf connected to a compatible system controller initializes all set up parameters automatically. No adjustments are needed.

OmniOn Energy’s NE075DC05 48 V<sub>DC</sub> to 5 V<sub>DC</sub> Converter is designed to efficiently transform energy from a 48 Volt DC source into the 5 Volt DC power needed for existing wireless base station equipment. This means that new 48 V DC power and batteries supporting modern 48V LTE deployments can also support legacy systems – without having to add an additional battery string.

Available in 1U shelves for mounting in 19 and 23 inch rack rails, the NE075DC05 can be used to make 5 Volts DC from any 48 Volt DC source.

Or if the existing battery system is supported by an Infinity M plant, 48 to 5 V converters can be added with no need for additional shelf hardware.

The NE075DC05 offers a powerful combination of efficiency, network simplicity and reliability for customers who have 48 Volts DC and need 5 Volts DC.

# Technical Specifications


## Electrical Specifications

| Input Voltage & Output Power                            |  |     |     |     |          |
|---|--|-----|-----|-----|----------|
| Parameter   | Symbol   | Min | Typ | Max | Unit     |
| Operating Voltage                                       | $V_{IN}$   | 40  |     | 60  | $V_{DC}$ |
| Absolute Limits (shut down < 18V, no damage over range) |  | 0   |     | 60  | $V_{DC}$ |
| Minimum Turn on Voltage                                 | $V_{IN}$   | 40  |     |     | $V_{DC}$ |
| Nominal DC input current @ 54.5V                        |  |     | 42  |     | A        |
| Max DC input current @ 40V in and 75 amps output        | $I_{IN}$   |     | 60  |     | A        |
| Inrush Current @ 60V input                              | $I_{IN}$   |     | <65 |     | A        |
| Holdover,   | >1 milliseconds, with Output droop from 27.25V to 23 V |     |     |     |          |


| OUTPUT                                    |  |     |          |      |                                       |
|---|--|-----|----------|------|---------------------------------------|
| Parameter                                 | Symbol   | Min | Typ      | Max  | Unit                                  |
| Output Voltage Setpoint                   | $V_{OUT}$  |     | 5.25     |      | $V_{DC}$                              |
| Output Voltage Range                      | $V_{OUT}$  | 4.5 |          | 5.25 | $V_{DC}$                              |
| Output Current                            | $I_{OUT}$  |     | 75       |      | A                                     |
| Voltage Regulation                        | $V_{OUT}$  |     | ± 0.5    |      | % w/ controller                       |
| Current Limit Setpoint (Full load)        |  | 30  |          | 100  | %                                     |
| Power Limit                               | W  |     | 395      |      | Watts                                 |
| Monotonic Start-up (Compare to overshoot) |  |     | <1.5     |      | %                                     |
| Ripple                                    | $V_{OUT}$  |     | 100, 250 |      | mV <sub>RMS</sub> , mV <sub>p-p</sub> |
| Capacitive Load Start                     |  | 2   |          |      | Farad                                 |
| Capacitive Load Switched                  | Recovers from a 68,000µF switched load in less than 75 ms. |     |          |      |                                       |
| Efficiency at 50% load                    | $\eta$   |     | 94       |      | %                                     |

## Characteristic Curves


NE075DC24A Efficiency

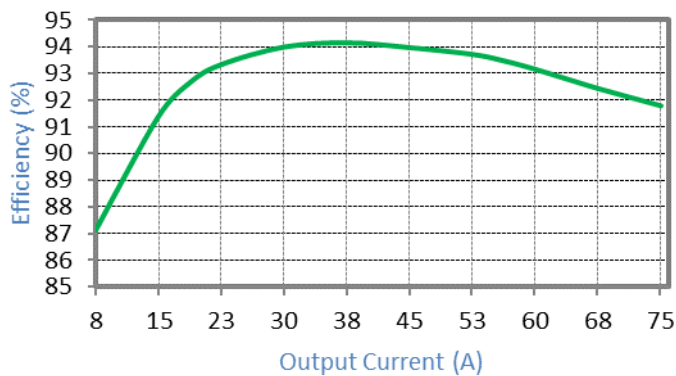


Power De-Rating Curve

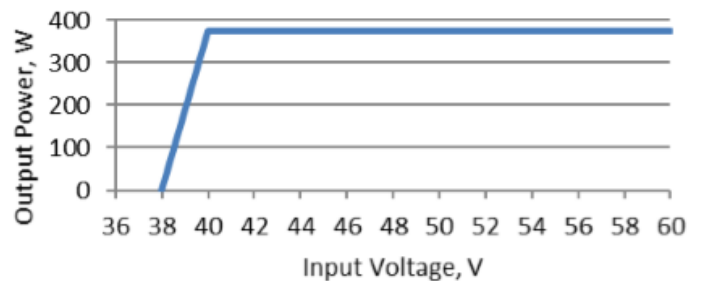

Rated Output Current

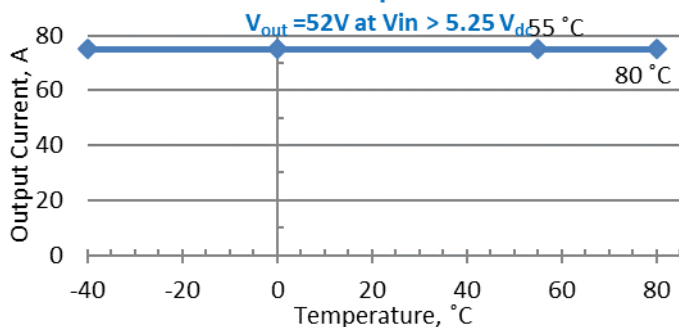

Current Limit Profile

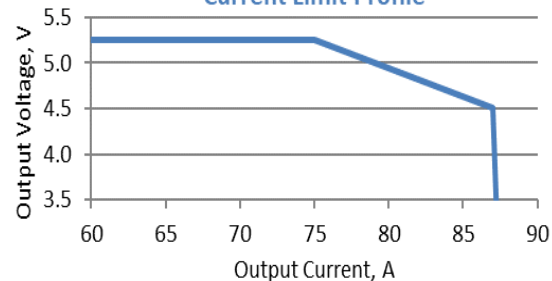

## Technical Specifications (Continued)


### Environmental, Compliance & Physical

|   |  |
|---|--|
| Operating Ambient Temperature Range             | -40°C to +75°C (Output derates at 2%/°C beginning at 55°C)             |
| Cooling Method                                  | Front to back airflow with onboard temperature controlled fans         |
| Operating Relative Humidity                     | 0 - 95% (non-condensing) for use in a controlled environment           |
| Electromagnetic Compatibility                   | FCC Part 15, EN 55032 (CISPR32), EN 55024, Level A, GR-1089            |
| Agency Certifications* planned                  | UL1950, EN62368, CSA*234/950, NEBS GR-1089, GR-63-CORE                 |
| Heat Release                                    | 205 Watts, or 700 BTU/hr at full load of 2080 Watts                    |
| Mean Time Between Failure (MTBF)                | 900k Hours @ 25°C per Telcordia SR-332, Method 1, Case 3               |
| Height x Width x Depth, Weight, Packaged weight | 1.63x5.23x13.85in (42x133x352mm), 5.05 lbs (2.2 kg), 5.95 lbs (2.7 kg) |

### Power Unit and Power Unit Shelf Connectors

| Power Unit PWB this side |         |         |         |       |       |                   |                   |                   |                   |       |       |       |                   |                   |                 |
|--------------------------|---------|---------|---------|-------|-------|-------------------|-------------------|-------------------|-------------------|-------|-------|-------|-------------------|-------------------|-----------------|
| A4                       | A3      | A2      | A1      | -48V  | -48V  | RTN <sup>1</sup>  | RTN <sup>1</sup>  | RTN <sup>1</sup>  | RTN <sup>1</sup>  | +5V   | +5V   | +5V   | PE/GND (ACEG)     | L2/N <sup>2</sup> | L1 <sup>2</sup> |
| B4                       | B3      | B2      | B1      |       |       | (-48 / +5V)       | (-48 / +5V)       | (-48 / +5V)       | (-48 / +5V)       |       |       |       |                   |                   |                 |
| C4                       | C3      | C2      | C1      |       |       |                   |                   |                   |                   |       |       |       |                   |                   |                 |
| D4                       | D3      | D2      | D1      |       |       |                   |                   |                   |                   |       |       |       |                   |                   |                 |
|                          |         |         |         | P12   | P11   | P10               | P9                | P8                | P7                | P6    | P5    | P4    | P3                | P2                | P1              |
| 4x Pins                  | 4x Pins | 4x Pins | 4x Pins | Blade | Blade | Blade MFBL (long) | Blade MFBL (long) | Blade MFBL (long) | Blade MFBL (long) | Blade | Blade | Blade | Blade MFBL (long) | Blade             | Blade           |

Shown looking into the rear of the power unit

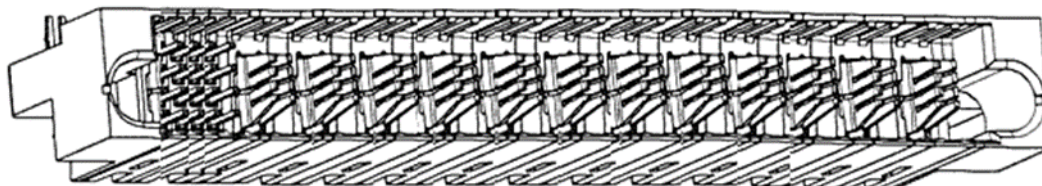

Power Unit Connector - AMP Multi-Beam XL (FCI # 51939-234LF or Tyco # 1900948-1)

### Signals and Signal Pins

| Pin | Length | Signal                                | Description   |
|-----|--------|---------------------------------------|---|
| A1  | Long   | RS-485-                               | non-Inverting RS-485 signal line (RS-485 A)   |
| B1  | Long   | RS-485+                               | Inverting RS-485 signal line (RS-485 B)   |
| C1  | Long   | Factory Programming & Converter Shelf | Reserved for Factory Programming - Open Circuit in the system shelf   |
| D1  | Long   | Return                                | <ul style="list-style-type: none"> <li>Signal Return for PSIDn, SIDn, &amp; Interlock</li> <li>Power Units Connect Return to NE Common Return internally.</li> <li>Power Units diode isolate the Return signals from each Power Slot.</li> </ul>  |
| A2  | Long   | PSID0                                 | Power Slot Address 0  |
| B2  | Long   | PSID1                                 | Power Slot Address 1  |
| C2  | Long   | PSID2                                 | Power Slot Address 2  |
|     |        |                                       | <ul style="list-style-type: none"> <li>Logic 1 = Open Circuit (~3.3V).</li> <li>Logic 0 = Connection to the Return signal (~0.7V).</li> <li>Left slot (front view) is Power Slot 1 and has address 000B.</li> <li>Power Slot ID signals are connected directly to the Return signal at each Power Slot or left open.</li> </ul> |

## Technical Specifications (Continued)


### Signals and Signal Pins

| Pin | Length | Signal              | Description   | Description   |
|-----|--------|---------------------|---|---|
| D2  | Long   | SID3                | Shelf Address 3   | <ul style="list-style-type: none"> <li>Logic 1 = Connection to Return signal (~0.7V). Logic 0 = Open Circuit (~3.3V).</li> <li>Shelf addresses 1 (00001B) through 31 (11111B) are valid. Shelf address 0 (00000B) is invalid. Address 31 (11111B) disables comm. fail LED</li> <li>Power Unit Shelf ID signals connect to Shelf Return left open</li> </ul> |
| A3  | Long   | SID4                | Shelf Address 4   |   |
| B3  | Long   | SID5                | Shelf Address 5   |   |
| C3  | Long   | SID6                | Shelf Address 6   |   |
| D3  | Long   | SID7                | Shelf Address 7   |   |
| A4  | Short  | Interlock           | <ul style="list-style-type: none"> <li>Disables power conversion within a Power Unit when not connected to the Return signal</li> <li>Power Unit Shelves connect Interlock directly to the Return signal at each Power Slot.</li> </ul> |   |
| B4  | Long   | Factory Programming | Reserved for Factory Programming – Open Circuit in the system shelf.  |   |
| C4  | Long   |                     |   |   |
| D4  | Long   |                     |   |   |

Note: The NE040DC48 behaves as an NE030DC48 when provided with slot addresses 1-4. Slot addresses 5-8 obtain the performance detailed in this data sheet.

# Technical Specifications (Continued)

## Physical Interface Dimensions

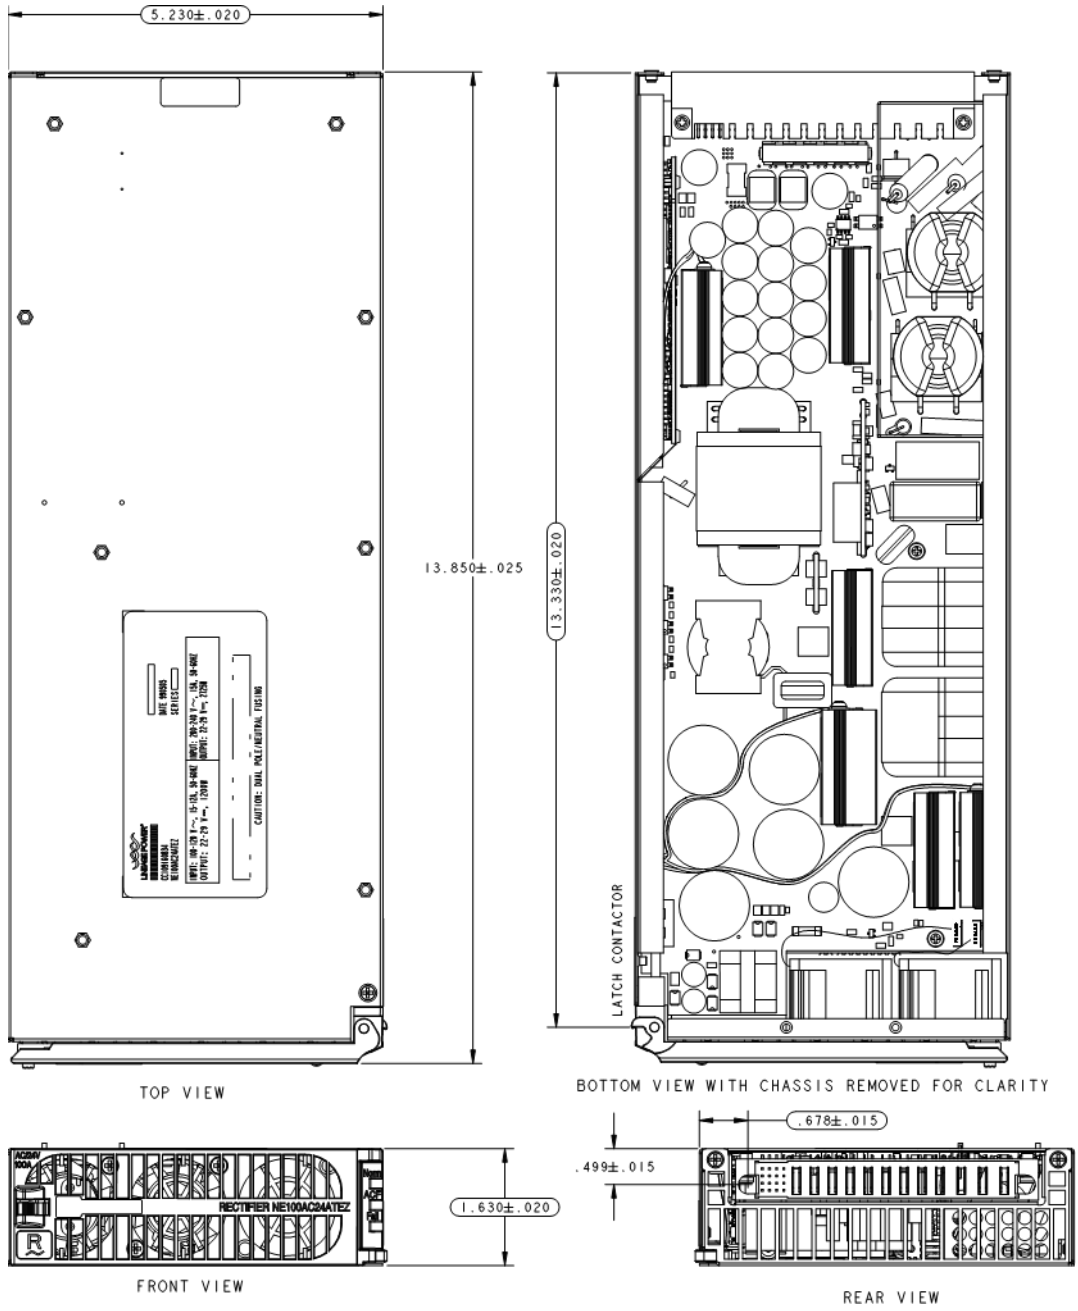

## Change History (excludes grammar & clarifications)

| Revision | Date       | Description of the change       |
|----------|------------|---------------------------------|
| 1.1      | 07/16/2021 | Initial Release                 |
| 1.2      | 08/22/2023 | Added ordering code under title |
| 1.3      | 10/25/2023 | Updated as per OmniOn template  |
| 1.4      | 01/04/2024 | Updated to change FS to DS      |

## **OmniOn Power Inc.**

601 Shiloh Rd.  
Plano, TX USA

[omnionpower.com](https://omnionpower.com)

We reserve the right to make technical changes or modify the contents of this document without prior notice. OmniOn Power does not accept any responsibility for errors or lack of information in this document and makes no warranty with respect to and assumes no liability as a result of any use of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of OmniOn Power. This document does not convey license to any patent or any intellectual property right. Copyright© 2023 OmniOn Power Inc. All rights reserved.